

7.1.2: The Institution has facilities for alternate sources of energy and energy conservation measures

Solar Energy

INDEX

Sr. No.	Process	Page No.
1.	Solar Energy Project- 400 kW Solar Roof Top PV Plant	2
2.	Outcomes of Solar Energy initiative	4
3.	Solar-Wind Hybrid Plant: Photo	5
4.	Solar Water Heaters: Photos	6
5.	Purchase Orders of 100 kW Solar Photo Voltaic Plant	7
6.	Purchase Orders of 300 kW Solar Photo Voltaic Plant	13
7.	Purchase Orders of 5kW Solar-Wind Hybrid Plant	20
8.	Amrutvahini Sanstha Policy for Solar Energy	22
9.	Bills for Electricity mentioning Export of Electricity	23-27




1. Solar Energy Project- 400 KW Solar Roof Top PV Plant:

- Institute has installed 400 KW Solar Roof Top PV Plant as a clean energy project to make the campus eco-friendly. The project has been successfully installed and generating power which is more than energy requirement of the campus. The surplus power is export to MSEDCL (2.87 Lakh units)
- Effective utilization of natural sunlight in the campus.
- Using solar water heater at hostels. (capacity 41000 Litres per day)
- Use of Solar street lights in the campus.

Solar Roof Top PV Plant SRTPV Impact





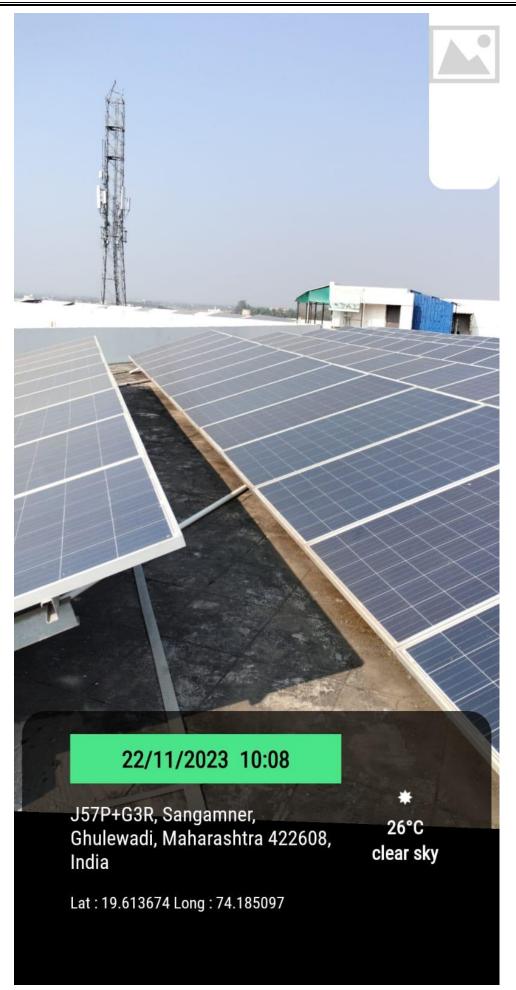



Installation cost (Rs. In lakhs) = 148.25

Generated electricity = 1303 Mwh

Estimated saving (Rs. In lakhs) = 177.86

CO2 Saving = 782600 Kg


Outcomes:

1. Awarded as "Energy efficient Unit" in 21st National Energy Award for Excellence in Energy Management organized by Confederation of Indian Industry (CII).

- 2. 12th State Level Energy Conservation Award of excellence in energy conservation and management by MEDA.
- 3. Clean and Green Campus Award from AICTE, New Delhi.
- 4. Reduction in Energy Consumption as Reflected in Electricity bill.




2. Solar-Wind Hybrid Plant: Photo

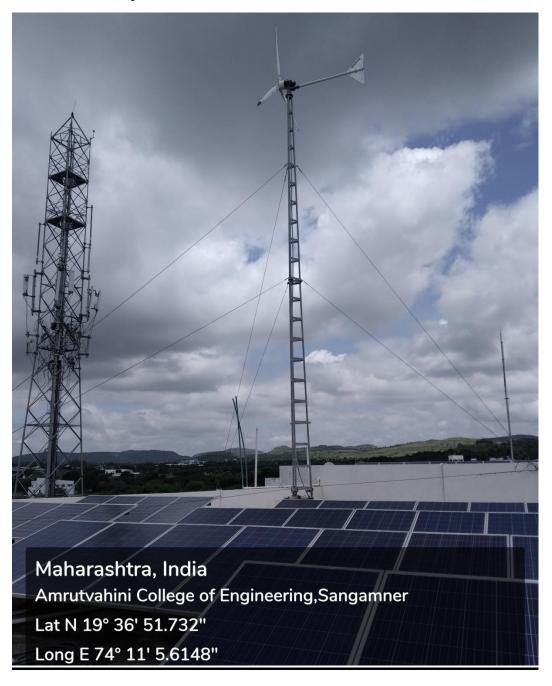



3. Solar Water Heaters: Photos



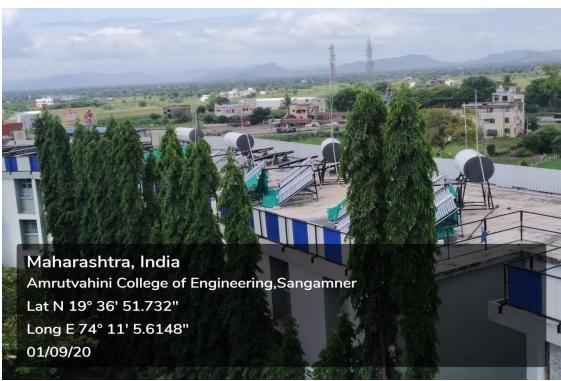



4. Purchase Order of 100kWp Solar PhotoVoltaic Plant:

Amrutvahini Sheti And Shikshan Vikas Sansth's

Amrutvahini College Of Engineering Ghulewadi, Sangamner.

P.O.Sangamner S.K. Tal-Sangamner, Dist-Ahmednagar-422 608, Phone No-02425-259016/259017

-:PURCHASE ORDER:-

Order No.AE Purchase Electrical Dept. /

/2017-2018

Date: - 03/08/2017

M.S: - Ravindra Energy Limited,

BC-109, Davidson Road, Camp,

Belgaum - 500 001, Karnataka, India.

Ref:-Your Quotation No. ----- & Date:- 24/05/2017. Ref:- Our Quotation No. ---- & Date:- 23/03/2017.

Dear Sir,

With reference to your above cited quotation. We are pleased to place our order for supplying the following goods as per the term and conditions mentioned below. Please acknowledge receipt of the

Sr. No	Particulars	Quantity	Rate	Total Rs
	100 kwp SRTPV Systems – Solar Photo Voltaic Modules – 323 Nos. Make / Vendor – Vikram Solar. Specification – * Module Capacity - 310 Wp, 72 Polycrystalline solar cells. * Cell Encapsulant - EVA (Ethylene Vinyl Acetate) type * Module Size -1960 x990 x 45mm, Wt: 22.5 kg * string arrangement - 20 modules * Module Efficiency - 16.15% * Superstrate - High Transmission low iron tempered glass, AR coated. * Temperature Range40°C to +85°C * Module Frame - Anodized aluminum frame with twin wall profile * Junction Box - IP67,3 bypass diodes * Performance Warranty - Linear power warranty for 27 years with 2.5% for 1st year degradation and 0.67% from 2 to 27 year * Approvals and Certificates - IEC 6125 Ed2, IEC 61730, IEC 61701, IEC 62716, CE, MCS, PV Cycle, IEC 62804	01 Set.	35,25,000=00	35,25,000=00
1.1	Power Coditioning Unit (PCU) Invertor – 50KW x 02 Nos. Make / Vendor – Delta make. Specification – * Maximum Input Voltage - :1000 V (DC) * MPPT Voltage range - :520-800 V (DC) * Start-Up Voltage - :>250V (DC)			

P.T.O.



	A STATE OF THE STA		
lucies			
Rec 12V	to I		-
batt	DC/AC disconnection Switch - : Provided (in-		
ry b	built) * AC Voltage range - : 3Phase 400 V +/- 20%		
115. 1	(320-480 V)		
(D)	* Nominal Frequency - : 50Hz		
na'	* Power factor at rated power - : Unity		
	* Maximum Efficiency - : 98.60%		
n	* Loading Factor -: 18% of rated Capacity		
>	* Threshold harmonic distortion (THD)-: <3% at	1 1	
•	* Protections - : IP65 protection level for both		
	AC and DC Side		
	* Operating temperature - : -25°C to +60°C		
	* Relative Humidity - : 0-100%, Non condensing		
	* Built-in Energy data logger - : Provided		
	* Communication Interface - : MODBUS RTU		
	over RS 485 physical layer		
	* Graphical display -: 20 X 4 LCD		
	* Emergency power off(EPO) - : Yes, External		
	switch to be connected		
	* Efficiency Standards - : IEC61683:1999,		
	: IEC 60068-2-1, IEC 60068-2-2, IEC 60068-2-14,	.	
	IEC 60068-2-30,		
	* Environmental testing - IEC 60068-2-6, IEC		
	60068-2-21, IEC 60068-2-27, IEC 60068-2-75		
	(As per MNRE and SECI requirement)		
	* Anti-islanding protection - : VDRE-AR-N 4105;	.	
	VDE 0126-1-1	'	
	* Safety - : IEC 62109-1/2		
	* Indicators -		
	1) Inverter and Grid ON,		
	2) Inverter over /under voltage,		
	3) Inverter overload,		
	4) Inverter over temperature		8
	* Remote Monitoring -		
	1) DC power input		
	2) DC input voltage		
	3) DC input current		
	4) AC power output		
	5) AC voltage		
	6) AC current		
	7) AC frequency		
	8) Power factor		
	9) Energy harvested		
	10) Inverter status		
	11) Total power generated		-
	11) Lovar bower Repetated	A	



1.2	Module Mounting Structure - As per Design			
	Std. & Layout			
	Specification -			
	Wind Velocity withstanding Capacity – 180			
	KMPH/50 m/s			
	* Structure Material – Hot dip galvanized steel		1	
	with 80 microns galvanization thickness, all			
	structural members and washers shall be			1
	galvanized in accordance with IS:4759		İ	
	* Bolts, nuts, fasteners, panel mounting clamps	i		
	Stainless steel SS304	ľ		
	Distance between parapet wall and mounting	1		1
	structure – 600 mm	-		
	* Slope of Structure - 16 degree	1		
1.3	Junction Boxes - 50 KW X 02 Nos.			
	Make - Nordic / Adlere / Trinity			
	Specification –	1		
	> DC Junction Box -	1		
	* No of inputs and outputs (50 KW Inverter): 10			
	in – 10 Out			
	* DC fuses - : 15 Amps, 1000 V			
	* Surge protection device - : 1000V			
	* Enclosure - :Thermoplastic polycarbonate box			
	with transparent lid			
	* Protection - : IP65 protection			
	> AC Junction Box -			
	* No of inputs and outputs (50 KW Inverter)-:1			
	in – 1 Out (4-Wire)			
	* Isolation switch - : 4 pole, MCCB (50KW			
	Inverter-125 amps & 30KW Inverter-63 amps)	1		
	* Surge protection device -: 3-Phase 415 Volts			
1	* Enclosure - :Thermoplastic polycarbonate box			
	with transparent lid			
	* Protection - : IP65 protection			
1.4	Cables And Accessories - As Per design std. &			
	layout.			
	Make - Havela / KEI/Unicab/Reputed.			
	Specification –			
	➤ DC Cables			
	* Size - : Single Core 4 Sq.mm 1.5 KV grade		8	
	* Type of material -: Tinned copper			
	* Type of insulation -: XLPO			
	* Type of outer sheath - : PVC, flame retardant			
	and halogen free			
	* Cable Standards -: IS 7098, IEC-60502, BS-5467			
	> AC Cables			
	* Size - : 3 core 95 sq.mm Al HT cable			
	L	I.	1	

P.T.O.



	: 3.5 core 120 sq.mm Al 1.1 KV grade L1 cable		
	- 3 5 core 200 co mm Al 1 1 KV grade L1 Cable		
	: Single core 6 sq.mm copper green PVC flexible		
	earth wire		1
	· Single core 35 sq mm flexible copper cable	-	
	Type of material - : Aluminum and copper		
	* Tues of inculation -: YIPF		
	• Type of outer sheath - : PVC, flame retardant		
	and halogen free		
	• Cable Standards - : IS 7098, IEC-60502,BS-5467		
1.5			
• • • •	Make - Finolex / Kisan		
	Specification -		.\
	* Termination kit - : 11 KV 3 core 95 sq.mm		1
	Aluminium HT cable (indoor and outdoor type)		1
	* PVC conduit pipes - : PVC pipe- 1, ½ " heavy		
	duty class 3 (PN), 6 kgf/ cm2.		
	: Elbow long bend suitable for 1, ½ " PVC pipe		
1.6			1
	layout		,
1	Make – AS Per the MSEDCL		
-	Recommendation.		
- 1	Specification –		
- 1	* Current Transformer - : Voltage class : 11 KV		
	Ratio : 30/-1-1 Amps		
	Accuracy class: 0.2S		
	Burden : 2.5 VA		
	* Potential Transformer - : Voltage class : 11 KV		
	Ratio : 11000V/110V/RT3-110V/RT3 volts		
	Accuracy class : 0.2		
	Burden : 15 VA		
	-0-100 Personal September 1981		
	Energy meters - : Model : ER 300 P. Make -		
1	.&T make.		
	Voltage: 3x63.5 volts, 3 phase 4 wire, 50 Hz		
	Accuracy class: 0.2S		b)
	Impulse: 50000 impulse per kwh.		
	Type: Ridirectional Top		
	Type: Bidirectional – TOD and DLMS.		
_	No of meters: 2 Nos (Main meter and Check		
	receif		
-	arthing And Protection - As per design std.		
	lake - Matrix / True Power / P		
S	lake – Matrix / True Power / Ecosysm / JEF pecification –		
	Type - : Giffat as		
•	Type -: GI flat 25x3 mm size		
1	Earthing Material - : Earthing electrodes, pemical filled, 2 meter, 5 mm thick, 50 mm dia		
	chilled 3 -		
	pipe with back fill compound		

PТO.



	• Earthing Resistance - : < 5 Ohms for each pit		
1.8	and <1 Ohm for grid line LT Pannel - As per design std. & layout Make - AS per the requirement and shall met all the latest MSEDCL/MNRE/SECI Guidelines And IEC Specification - Panel shall consist with other essentially required accessories like MCB./fuses/TTB / Glass window etc. those shall be MSEDCL guidelines/specifications. Type of fabrications/ cable termination arrangements etc. to be complied MSEDCL standards		
1.9			
1.10	Lighting & Surge Protection - As per design std. & layout Make - JEF/True Power/ECosysm. Specification - * Type -: ESE type with 5 meter GI mast shall be provided to cover the building area * Protection -: As per Indian Electricity Act for safety and IEC 62305		
1.11	Module Cleaning Systems - As per design std. & layout Specification - * Modules Cleaning and Maintenance - : Water pipe line, Pump, elbow, post pipe and Electrical connection with MCB for protection	-	
	Rs- Thirty Five Lack Twenty Five Thousand Only.	Total Rs	35,25,000

Terms and Conditions

1. Price of the Solar Project Work:

The price must include all the taxes applicable including GST (Goods and Service Tax) as on the date of this offer.

2. Bank Guarantee against the guaranteed performance:

The party (system provider) has to provide the Bank Guarantee of 10% of projects cost for the period of one year against specified guaranteed performance of project/system (Annexure 1).

3. The work related to Subsidy:

The party should look after the necessary things required for submission and to get the sanction of subsidy from government agency.

The scope of this work also includes obtaining approvals/ clearances from statutory authorities (ESCOM, MSEDCL/ electrical inspector/ factory inspector etc).

4. Terms for Disbursement of the Payment:

- a) Thirty percent (30%) amount will be paid along with purchase order against bank guarantee.
- b) Forty percent (40%) amount will be paid after receiving the material in our institute at site.

P.T.O.



c) Eitheen percent (15%) will be paid after installation of the project. cula d) Eifteen percent (15%) will be paid after successful trial of the project VIIII 5. Operation and Maintenance (O & M) cost of the system: a) Periodic Cleaning of the modules will be responsibility of user a) Periodic Cleaning of the modules will be responsibility of the modules will be responsibility of the modules will be responsibility of the Bosy and Balance-of-System (Bosy) and Balance-of 1 1411 of routine and breakdown maintenance.

c) Replacement of defective modules, PCUs etc subject to warranty/ guarantee if any and insurance. 1 60 d) Supply of spares and consumables as and when required. Incl EGI nufacturer's warranty -Solar PV Modules – 10 years from date of supply, against material and workmanship defect 6. Manufacturer's warranty Solar PV Modules – 10 years from date of supply Solar PV Modules – 10 years fr as follows, 90% for a period of 12 year and 80% for a period of 25 years under STC 10 ica, Inverter – 1 year from date of supply, against manufacturing defects Inverter – 1 year from date of supply, against on various components of the project for which PS manufacturer's warranty is available. 2. Warranty does not apply under following conditions Warranty does not apply under visual warranty does not apply under visual visua ran as per product manual b. Any unauthorized tampering of electrical parts and connections c. Any damage to the electrical components due to heavy fault on the load side 11 d. Product has been subject to abnormal environmental conditions such as acid rain or other such similar na conditions, viz. unprecedented heavy winds and rains, etc. 0 B) Operation & maintenance for first 5 years. As already discussed & agreed -1) AVCOE will provide manpower for periodic module cleaning. 2) REL will assist for technical monitoring & technical person visit schedule will be-Year one- First 6 month - Monthly, second 6 month - once in 2 months. Year two & three - Quarterly. Year four & five -Once in 6 months. C) Operation and Maintenance cost of the System O&M work will include Periodic cleaning of modules. o Periodic check of Modules, PCUs, and BoS as a part of routine and breakdown maintenance Replacement of defective modules, PCUs etc subject to warranty. * Annual Maintenance contract will be finalise after 05 year of free services periods. D) Remote DATA - Monitoring -Below output from inverter will be available -DC power input, DC input voltage, Input current, AC power output, AC voltage, AC current, AC frequency, Power factor, Energy harvested, Inverter status. 7. Project Completion Period The system should be ready for commissioning within 90 days from the date of advance payment. Principal Copy to:- 01) A/C Dept. (02) H.O. D. 03) Store Dept. 04) O.C. PUR-R-03, Rev-00, Date-03-07-3010

12



5. Purchase Orders of 300 kWp Solar Photo Voltaic Plant

Amrutvahini Sheti and Shikshan Vikas Sanstha's

Amrutvahini College of Engineering, Sangamner.

P.O. Sangamner S.K. Tai-Sangamner, Dist-Ahmednagar-422 608, Phone No-02425-259016 259017

-: PURCHASE ORDER:-

Order No.AE/Purchase/ Electrical Dept./ 1732 /2017-2018

Date:- 15/03/2018

M/S. Ravindra Energy Limited, BC- 109, Davidson Road, Camp, Belgaum - 590 001 Karnataka, India.

Ref:-Your Quotation No. Email & Date:- 05/02/2018.

Ref:- Our Request for Quotation No. 1937 & Date:- 02/02/2018.

Dear Sir.

With reference to your above cited quotation, we hereby place our order for supplying the following goods as per the term's and conditions mentioned below. Please acknowledge receipt of the

Sr. No	Particulars	Quantity	Rate (Each)	Total Rs
i	300kW SRTPV System-Solar Photo Voltaic Modules Make: Vikram Solar Module Capacity - 320Wp, 72 Polycrystalline solar cells. Cell Encapsulant EVA (Ethylene Vinyl Acetate) type Module Efficiency 16.15% Superstrate High Transmission low iron tempered glass, AR coated Temperature Range40°C to +85°C Module Frame Anodized aluminum frame with twin wall profile, Junction Box, IP67, 3 bypass diodes, Performance Warranty, Linear power warranty for 27 years with 2.5% for 1st year degradation and 0.67% from 2 to 27 year Approvals and Certificates IEC 6125 Ed2, IEC 61730, IEC 61701, IEC 62716, CE, MCS, PV Cycle, IEC 62804	940 No's	98,00,000=00	98,00,000=00
2	Power Conditioning Unit (PCU) Make: Delta make. Inverter Maximum Input Voltage: 1000 V (DC) MPPT Voltage range: 520-800 V (DC) Start-Up Voltage: >250V (DC) DC/AC disconnection Switch: Provided (inbuilt) AC Voltage range: 3Phase 400 V +/- 20%	50KW X 6 No's		



			A COMPANY AND REAL PROPERTY OF THE PROPERTY OF	1
-				
	(320-480 V)			
	Nominal Frequency : 50Hz	=		
	Power factor at rated power : Unity			
	Maximum Efficiency: 98.60%			
	Loading Factor: 18% of rated Capacity	,		
	Threshold harmonic distortion (THD)			
	: <3% at rated power			
	Protections: IP65 protection level for both			
	AC and DC Side Operating temperature:			
	25°C to +60°C			1
	Relative Humidity: 0-100%, Non condensing			
	Built-in Energy data logger : Provided			
	Communication Interface: MODBUS RTU			
	over RS 485 physical layer			
	Graphical display : 20 X 4 LCD			
	Emergency power off(EPO) : Yes, External			
	switch to be connected			
	Efficiency Standards : IEC61683:1999,			
	Environmental testing			
	: IEC 60068-2-1, IEC 60068-2-2, IEC 60068-			
	2-14, IEC 60068-2-30,			
	IEC 60068-2-6, IEC 60068-2-21, IEC			
	60068-2-27, IEC 60068-2-75			
1	(As per MNRE and SECI requirement)			
	Anti-islanding protection : VDRE-AR-N			
	4105; VDE 0126-1-1 Safety			
	: IEC 62109-1/2			
	Indicators : Inverter and Grid ON			
	Inverter over /under voltage,			
	Inverter overload,			
	Inverter over temperature			
	Remote Monitoring			
	: DC power input			
	DC input voltage			!
	DC input current			
	AC power output			
	AC voltage			
	AC current			
	AC frequency			
	Power factor			
	Energy harvested			1
	Inverter status			1
	Total power generated			1
3	Module Mounting Structure			
	Wind Velocity withstanding Capacity	A		
100	180 KMPH/50 m/s Structure Material Hot dip	As per		
		design		
		std. &		
		layout		
	members and washers shall be galvanized in			1



	accordance with IS:4759 Bolts, nuts, fasteners, panel mounting clamps Stainless steel SS304 Distance between parapet wall and mounting structure 600 mm Slope of Structure 16 degree		
4	Junction Boxes Make: Nordic/Adlere/Trinity DC Junction Box No of inputs and outputs (50 KW Inverter): 10 in – 10 Out And 6 in - 6 Out As Per Selection of inverter DC fuses: 15 Amps, 1000 V Surge protection device: 1000V Enclosure: Thermoplastic polycarbonate box with transparent lid Protection: IP65 protection AC Junction Box No of inputs and outputs (50 KW Inverter): 1 in – 1 Out (4-Wire) Isolation switch: 4 pole, MCCB (50KW Inverter-125 amp. Surge protection device: 3-Phase 415 Volts Enclosure: Thermoplastic polycarbonate box with transparent lid Protection: IP65 protection	50KW X 6No's	
	Cables and Accessories Make: Havells DC Cables Size: Single Core 4 Sq.mm 1.5 KV grade Type of material: Tinned copper Type of insulation: XLPO Type of outer sheath: PVC, flame retardant and haiogen free Cable Standards: IS 7098, IEC-60502,BS- 5467 AC Cables Size: 3.5 core 95 sq.mm Al HT Armoured cable: 3.5 core 120 sq.mm Al 1.1 KV grade LT Armoured cable: 3.5 core 300 sq.mm Al 1.1 KV grade LT Armoured cable: Single core 6 sq.mm copper green PVC flexible earth wire: Single core 35 sq.mm flexible copper cable Type of material: Aluminum and copper as per string design Type of insulation: XLPE	As per design std. & layout	



	Type of outer sheath: PVC, flame retardant and halogen free Cable Standards: IS 7098, IEC-60502, BS-5467			
	Accessories (As per design standard and layout) Make: Finolex :1.1 KV 3.5 core 95 sq.mm Aluminum HT cable (indoor and outdoor type) PVC conduit pipes : PVC pipe- 1.½ " heavy duty class 3 (PN), 6 kgffcm2 (UPVC) : Elbow long bend suitable for 1 . ½ " UPVC pipe			
7	As per the MSEDCL recommendation Current Transformer: Voltage class: 11 KV Ratio: 30/-1-1 Amps Accuracy class: 0.2S Burden: 2.5 VA Potential Transformer: Voltage class: 11 KV Ratio: 11000V/110V/RT3-110V/RT3 volts Accuracy class: 0.2 Burden: 15 VA Energy meters: Model: ER 300 P Voltage: 3x63.5 volts, 3 phase 4 wire, 50 Hz Accuracy class: 0.2S Impulse: 50000 impulse per kwh. Type: Bidirectional - TOD and DLMS. No of meters: 2 Nos (Main meter and Check meter)	As per design std. & layout		
8	Earthing and Protection Make: Matrix/True Power/Ecosysm/JEF Type: GI flat 25x3 mm size Earthing Material: Earthing electrodes, chemical filled, 2 meter, 5 mm thick, 50 mm dia GI pipe with back fill compound Earthing Resistance: < 5 Ohms for each pit and <1 Ohm for grid line	As per design std. & layout		
y	As per MSEDCL/MNRE/SECI guidelines and IEC Standards Powder coated Panel shall consist with other essentially required accessories like LT panel should consist of required busbar chamber ACB / MCCB, necessary meters required cables/wires and CT &PT. MCB./fuses TTB / Glass window etc. those shall be MSEDCL guidelines/specifications	As per design std. & layout	W.	



10	Type of fabrications/ cable termination arrangements etc. to be complied MSEDCL standards Main Junction Boxes As per the requirement and shall meet all the latest MSEDCL/MNRE/SECI guidelines and IEC standards Lightining & Surge Protection Type Make: JEF/True power/Ecosym : ESE type with 5 meter GI mast shall be provided to cover the building area Protection : As per Indian Electricity Act for safety and	As per std. As per design std. & layout		
12	Module cleaning system Modules Cleaning and Maintenance : Water pipe line, Pump capacity must be suitable for water sprinkler system to cover all solar panels, starter, elbow, post pipe and Electrical connection with MCB for protection Suitable water sprinkler system is recommended UPVC pipe should be suitable for high pressure UPVC type to clean PV modules	As per design std. & layout		
13	Monitoring system SCADA system SCADA should be compatible for 400kwp plant & wireless connectivity for online remote monitoring system to cover all parameters. CCTV Camera outdoor CCTV camera 10X Hikuzen cat 6 D-Link make cable 05mega pixel Bullet camera Ethernet Cable Ethernet Cable - Cable sheath diameter (∅) 2 x 5 to 7 mm, Cable type STP cable (Shielded Twisted Pair, CAT 6 Cable D-Link make characteristic impedance - 100 Ω to 120 Ω RJ45 connector RJ45 connector RJ45 connector: RJ45 for Ethernet (Metallic Wire size 24 to 26 AWG (depending on design of the RJ45 plug) Cable shield termination Via RJ45 plug Unmanaged Ethernet Switch Unmanaged Ethernet Switch Unmanaged Ethernet Switch RMU	6 No Camera As per design std. & layout		



Central communication unit for at maximum 30 PV/50kW/33kW Inverters, integrated modbus interface, interface for compatible		
weather stations and external 1/O module	Total Rs-	98,00,000
Rs-Ninety Eight Lacks only.		300-00

Terms and Conditions:

1. Price of the Solar Project Work:

The price must include all the taxes applicable including GST (Goods and Service Tax) as on the date of this offer.

2. Bank Guarantee against the guaranteed performance:

The party (system provider) has to provide the Bank Guarantee of 10% of project cost for the period of one year against specified guaranteed performance of project/system (Annexure 1).

3. The work related to Subsidy:

The party should look after the necessary things required for submission and to get the sanction of subsidy from government agency.

The scope of this work also includes obtaining approvals/ clearance from statutory authorities (ESCOM, MSEDCL-Regional, Divisional and Sub-divisional office etc./ electrical inspector/ factory inspector etc).

4. Terms for Disbursement of the Payment:

- a) Thirty percent (30%) amount will be paid along with purchase order against bank guarantee.
- b) Forty percent (40%) amount will be paid after receiving the material at site in our institute.
- c) Fifteen percent (15%) will be paid after installation of the project.
- d) Fifteen percent (15%) will be paid after successful trial of the project.

5. Operation and Maintenance (O &M) cost of the system:

The scope of the O &M work will include:

- a) Periodic Cleaning of the modules will be the responsibility of user.
- b) Periodic check of Modules, Power Conditioning Unit (Inverter/PCUs), and Balance-of-System (BoS) as a part of routine and breakdown maintenance.
- c) Replacement of defective modules, PCUs etc. subject to warranty/guarantee if any and insurance.
- d) Supply of spares and consumables as and when required.

6. Manufacturer's warranty:

- a) Solar PV Modules 10 years from date of supply against material and workmanship defect. Power warranty: Manufacturer warrants that the module will exhibit nominal power output for 25 years as follows; 90% for a period of 12 year and 80% for a period of 25 years under STC.
- b) Inverter 1 year from date of supply against manufacturing defects.
- c) REL (Ravindra Energy Limited) will obtain manufacturer's warranties on various components of the project for which manufacturer's warranty is available.

B) Operation & maintenance for first 5 years (As already discussed & agreed) –

- 1) AVCOE will provide manpower for periodic cleaning of modules.
- 2) REL will assist for technical monitoring & technical person visit schedule will be-Year one: a) First 6 month – Monthly b) Second 6 month – Once in 2 month. Year two & three:- Quarterly. Year four & five:- Once in 6 month.
- 3) Incase of emergency REL Should send service engineer immediately.



C) Operation and Maintenance cost of the System

O&M work will include:

- Periodic cleaning of modules.
- Periodic cleaning of modules.
 Periodic check of Modules, PCUs, and BoS as a part of routine and breakdown
- Replacement of defective modules, PCUs etc. subject to warranty.
- * Annual Maintenance contract will be finalized after 05 year of free service period.

D) Remote DATA - Monitoring:

Below output from inverter will be available-S

DC power input, DC input voltage, Input current, AC power output, AC voltage, AC current, AC frequency, Power factor, Energy harvested, Inverter status.

7. Project Completion Period

The project system should be ready for commissioning within 60 days from the date of issue of purchase order. If not followed then penalty of Rs. 5000/Day will be charged. The penalty amount will be deducted from the final bill payment.

- 8. The curing of concrete related activity should be executed properly (i.e. purchasing of jute gunny bags and should be kept covered the concrete elements in wet condition round the clock for at least
- 9. The party has to submit the project execution cum completion schedule (i.e. Bar chart and or Gantt chart showing the various activities along with time duration for its completion independent/dependent/concurrent).
- 10. The party should submit the detailed analysis of payback period for the project.
- 11. The party should submit the test certificate and / or report from competent authority at the time of sending the material (equipment/machinery) at site.
- 12. The party should give the detailed drawing (structural plan, elevation, section, index map, layout) & specifications of Civil work and Electrical work required for completion of the project at the time of commencement of the project.
- 13. There will be agreement between both the parties for 300KW SRTPV Project (the system provider and owner).
- 14. Any accident/injuary caused to you as your labour during completion of project, which will be your sole responsibility.
- 15. After installation of the project while injecting the solar power into our existing systems if anything goes wrong due to your mistakes then it will be your sole responsibility.

Principal

Copy to:-01) A/C Dept. (92) H.O. D. 03) Store Dept. 04) O.C.

PUR-R-03, Rev:00, Date-15/06/2017



6. Purchase Order of 5kW Solar-Wind Hybrid Plant:

Amrutvahini Sheti And Shikshan Vikas Sanstha's Amrutvahini College Of Engineering Ghulewadi, Sangamner. P.O.Sangamner S.K. Tal-Sangamner, Dist-Ahmednagar-422 608, Phone No- 02425-259016/259017 :PURCHASE ORDER:-Order No.AE/Purchase/ Electrical Dept. / 1015 Date: - 05/ 10/2013 M/S:- Saidip Enterprises, K.G. Road, A/P. Tal - Akole, Dist - Ahmednagar. Ref:-Your Quotation No. SE/WS/35/2013-014 & Date:- 05/10/2013 Ref:-Our Enquiry No. --- & Date:- 02/07/2013 Dear Sir. With reference to your above cited quotation. We are pleased to place our order for supplying the following goods as per the term and conditions mentioned below. Please acknowledge receipt of the order Sr.No Quantity Total Rs **Particulars** 5kW Hybrid Solar Wind Energy system -01 Set. 12,00,000=00 12,00,000=00 Including Following Specifications 1) Wind electric genrator - 3.2kW, Unitron make Solar Panel – 1.8kW, mono/ multy crystalline solar PV panel of 'A' grade rating company. Make - Emmyee make 3) Inverters capacity - 5kVA /96V, pure sine wave. - 01 No.Make - Emerson make 4) Battery -400AH @96V, VRLA GEL battery bank - 48 cell. 5) Tower Height - 60ft. (as per requirement) Control pannel of solar system & wind system should consist of Voltmeter, Ammeter, and Frequency meter separately as well as main output control panel (Inventor output) should consist of Voltmeter, Ammeter. Electronics frequency meter, energy meter and power factor meter as per the rated capacity & design. There should be provision of measuring turbine speed by tachometer and wind velocity with the help of Anemometer. The entire meter should be AE make. There should be provision of change over switch of rated capacity to synchronies with the grid. Necessary required cables, wires should be provided by you only. Make - polycab/finolex Rs - Twelve Lack Only. Total Rs 12,00,000-00 Terms & Conditions:-01) Delivery: « Our College site at your cost. 02) Delivery Period- Before - 04 to 06 week. 03) Sales tax: - All taxes including in price. 04) Payment - 80% after receipt & approval of material against delivery & remaining 20% after successful Installations, testing and commissing and also traing to our staff by cheque only. Nonrefundable processing fee of Rs. 5000/- (Five Thousand Only) should be paid along with the P.O. P.T.O.

Scanned by CamScanner



06) Any accident / injury caused to you or your labour while working on our site will be your sole responsibility.

07) Subsidy of Rs. 5,00,000/- (Five Lack Only) to be paid by you within 01 year from government or your self to the college & registerd bond of Rs. 100/- to be submitted in this respect to college. Preprations of proposal for MNRA subsidy sanction is your own responsibility.

08) Warranty / Garranty – Wind generator along with balance of systems carry an extended warranty for two year. Solar panels – 10 years. Inverter & battery – 5 year warranty.

Purchase Dept.

H.O.D.


Copy to:- 01) A/C Dept. 02) H.O. D. 03) Store Dept. 04) O.C.

Principal

PUR-R-03, Rev:00, Date-03-07-2010



7. Amrutvahini Sanstha Policy Document for Solar Energy:

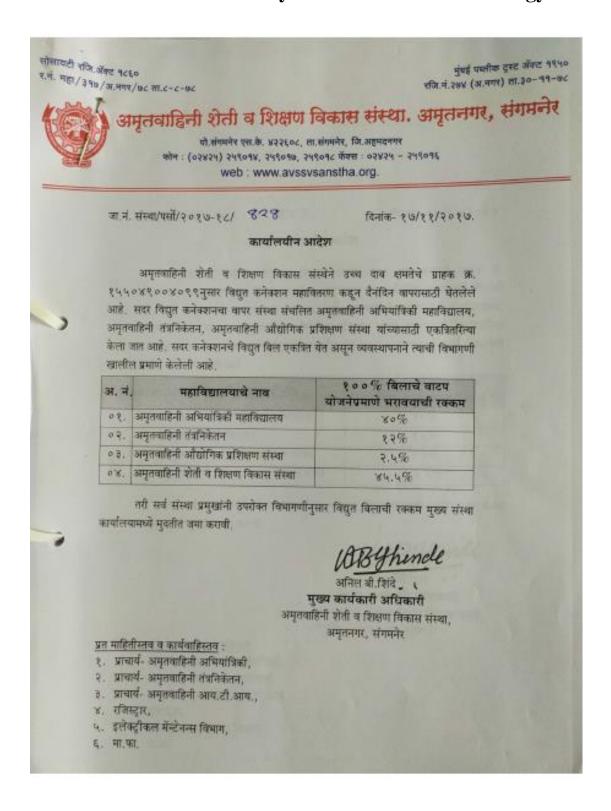



Ver 1.26.00



Maharashtra State Electricity Distribution Co. Ltd.

BILL OF SUPPLY	FOR THE MO	НТИС	OF MAY-2024	202405457007624
GSTIN:27AAECM2933K1ZB	Website	:www.ma	hadiscom.in	HSN CODE:27160000
AHMEDNAGAR CIRCLE - 570	SANGAMNER DN	- 573	SANGAMNER (U) SUB-DI - 207	

Consumer No.: 155049004099

Consumer Name: THE CHIEF EXECUTIVE, AMRUTWAHINI SHETI & 5 VS

Address: AMRUTWANINI SHETI & SHIKSHAN

VIKAS SANSTHA, AMRUTNAGAR

BILL DATE 06/06/2024 11,63,250.00 **DUE DATE** 20/06/2024 IF PAID UPTO 11,49,180.00 12/06/2024 IF PAID AFTER 20/06/2024 11.85.000.00 Last Receipt No./Date: 0010067805 / 08-02-2024

Last Month Payment: 0.00 Small Scale /

Village: TAL SANGAMNER DIST Scale / Sector Pin Code: 422608

ncipal@avcoe.org Mobile No.: 90**80 Meter No: 055-X0403855 Seasonal: Load Shed Ind: MIDC Sanctioned Load (KW): 450 Connected Load (KW): 425.00 Urban/Rural : Rural Express Feeder: No 75% of Con. Demand (KVA): 311.25 Feeder Voltage (KV): 11 Contract Demand (KVA):415.00 LIS Indicator: old trf HT-VIII B Tariff: 146 HT-VIII B

Date of Connection :	15/06/1991	Category: PUBL SERVICES OTH				GSTIN:		
Supply at: HT		Elec. Duty:	06	PART B	PAN:	AAATA7721N		
Prev. Highest (Mth) : NOV		Prev. Highest Bill Demand (KVA): 293			93			
S.D. Held Rs. :	23,39,700.00	Addl. S.D. Den	nanded	Rs. :	0.00	MIDC Zone: OTHER		
Bank Guarantee Rs.	: 0	S.D. Arrears R	s. :		0.00			

BILLING HISTORY						
Bill Month	Units	Bill Demand(KVA)	Bill Amount			
APR-24	1,16,209	311	19,17,042			
MAR-24	95,961	291	14,85,662			
FEB-24	82,076	291	13,00,918			
JAN-24	71,070	291	11,49,470			
DEC-23	74,879	291	12,06,712			
NOV-23	65,726	293	10,76,767			
OCT-23	1,07,464	291	16,27,387			
SEP-23	1,03,041	291	15,75,843			
AUG-23	87,983	291	13,39,588			
JUL-23	74,084	291	11,52,884			
JUN-23	78,272	291	11,99,880			
MAY-23	23,117	291	4,79,235			

CUSTOMER CARE Toll Free No. 1912, 1800-233-3435, 1800-212-3435

Rule & Procedure for Consumer Grievances Redressal is available

www.mahadiscom.in -> consumer portal -> CGRF

For making Energy Bill payment through RTGS/NEFT mode, use following details

- o Beneficiary Name: MSEDCL
- o Beneficiary Account Number: MSEDHT01155049004099
 o IFS Code: SBIN0008965 (fifth,sixth and seventh character is zero)
- o Name of Bank: State Bank of India
 o Name of Branch: IFB, BKC Branch-MSEDCL
 Disclaimer: Please use above bank details only for payment against consumer number mentioned in beneficiary account number.
- Tariff Revised w.e.f. 01.04.2024. Tariff Order is available at Mahavitaran Portal.
- Physical Bills are not served. You can view and pay bill online at portal https://wss.mahadiscom.in/wss/wss
- Consumer can pay bill through portal using various online modes.
- As per Income Tax provision vide section 269 ST cash receipt of Rs. 2.00 lakhs and above will not be accepted by MSEDCL against any type of payment.
- Activity: CHARITABLE EDUCATION INSTITUTION REGISTERED UNDER PUBLIC TRUST ACT 1950

Important Message:

- · Consumers can pay online using Net Banking, Credit/Debit cards at https://wss.mahadiscom.in/wss/wss after registration.
- · Submit / update your E-mail id and mobile number to Circle office for receiving prompt alerts through SMS.
- · Submit / update your PAN and GSTIN to circle office with copies of PAN and GSTIN for verification.
- Special desk is operational for HT Consumers, please contact : htconsumer@mahadiscom.in for any clarification / query or grievance.
- For any payment to MSEDCL, ENSURE & INSIST for computerized receipt with unique system generated receipt number. Do not accept hand written receipt. Pay online to avoid any inconvenience.

Follow us on:

G X 0 0



Consumer No. : 155049004099

CURRENT CONSUMPTION DETAILS							
Reading Date	KWH	KVAH	RKVAH (LAG)	RKVAH (LEAD)	KW (MD)	KVA (MD)	
Current 31/05/2024	314631.500		29225.000	34036.500	55.920	56.240	
Previous 30/04/2024	292518.000		27467.000	34007.000			
Difference	22113.500		1758.000	29.500			
Multiplying Factor	5.000		5.000	5.000	5.000	5.000	
Consumption	110567.500		8790.000	147.500	279.600	281.200	
L.T. Metering	0.000		0.000	0.000	0.000	0.000	
AdjustmentSolar	-1078.000		0.000	0.000	0.000	0.000	
Assessed Consumption	0.000		0.000	0.000	0.000	0.000	
Total Consumption	109490.000	109819.000	8790.000	148.000	280.000	281.000	
BILLING DETAILS Amount in Rs							

Total Consumption		109490	0.000	10981	9.000	3790.000		148.000) 20	0.000	281.000
BILLING DETAILS Amount in R								Amount in Rs.			
Billed Demand (KVA)	31	11	@ Rs	Rs. 549.00		Demai	nd Charge:	s			1,70,739.00
Assessed P.F.			Avg.	P.F.	0.997		ing Charge	e @	0.60 Rs/U		65,891.40
Billed P.F.	0.99	97	L.F.		36	Energ	y Charges				12,00,321.67
Consumption Type	Units	S	R	ate (harges Rs.	TOD T	ariff EC				- 34,678.10
Public Services	1,	09,819		10.93	12,00,321.67	FAC @	75.00	Ps./U			82,364.25
Residential		0		7.16	0.00						(3)
Commercial		0		13.21	0.00	Electri	icity Duty				3,11,774.03
E.D. on (Rs.)	Rate	%		Amou	nt Rs.	Bulk C	onsumpti	on Reba	te		0.00
0.00	0.0	0			0.00	Tax or	Sale @	18.00	Ps./U		19,708.20
0.00	16.0	0	0.00			Incren	nental Con	sumptio	n Rebate	\$\$	- 76,734.75
14,84,638.22	21.0	0		3,	1,774.03						0.00
TOD Zone	Rate	Un	its	Demand	Charges Rs.	Charg	es For Exc	ess Den	nand		0.00
00:00 Hrs-06:00 Hrs & 22:00 Hrs-24:00 Hrs	-1.50	4	6,402	248.00	-69603.00	Tax Co	ollection at	Source			0.00
06:00Hrs-09:00Hrs & 12:00Hrs-18:00Hrs	0.00	2	9,834	262.00	0.00	Debit	Bill Adjusti	ment			0.00
09:00 Hrs-12:00 Hrs	0.80		6,725	210.00	5380.00]					
18:00 Hrs-22:00 Hrs	1.10	2	6,859	281.00	29544.90						
						TOTAL	CURRENT	BILL			17,39,385.70
						Currer	nt Interest	03/0	6/2024		0.00
	EI EVEN	IVKH	CIYTY	TUDEE TO	IOUSAND TWO	Princip	pal Arrears	;			- 5,76,131.11
Amount In Words	LLLVLIV			D FIFTY ON		Interes	st Arrears				0.00
						Total I	Bill Amoun	t (Round	ded) Rs.		11,63,250.00
						Delay	Payment C	harges	Rs.		21,742.33
							Payable Aft Rounded to Ne				11,85,000

Signature Not Verified
Digitally signed by DS MAH RASHTRA STATE
ELECTRICITY DISTRIBUTION COMPANY LTD 3
Date: 2024 06 05 18:29:24
IST
Location: Mumbai

CONDITIONS

- 1. The total bill amount of the bill may be remitted by a Crossed Demand Draft/Cheque drawn in favor of "Maharashtra State Electricity Distribution Co. Ltd." Whenever Security Deposit is demanded separate Cheque/Bank Draft should be sent.
- 2. The current bill is payable within fifteen days from the date of issue of the bill. Even if there is any discrepancy in the bill or any other clarification needed, consumers are requested to pay the billed amount in full provisionally or under protest subject to review and subsequent adjustment, so that payment of delayed payment charges is avoided.
- 3. This bill is issued subject to the provision of the "Conditions and Miscellaneous charges for supply of Electrical Energy" of the MSEDCL.
- 4. Please quote the Consumer Number on the back of the Cheque. The payment of this bill should be made at Company's office only.
- 5. If the cheque is sent by post, the same should be posted three clear days in advance of the due date.
- 6. In case of payment made through RTGS/NEFT/Cheque/DD/Pay Order, the date of amount credited to MSEDCL's account will be treated as receipt date.

Collection Hours: 10-30 to 16-00 Hours (Except on Bank Holidays, Sundays, 2nd and 4th Saturdays)



	Pag
Consur	mer No.: 1550490040
This bill for power supply cannot be treated or utilised as proof that the premises for which the power supply has bee authorised structure nor would the issuance of the bill amount to proof of ownership of the premises. \$\$ Incremental Consumption Rebate if paid on or before 12-JUN-24: Rs. 76734.75 / after 12-JUN-24 Rs. 76734.75 on utonsumption: 7484	
Total Solar Generation Units : 49377;Rooftop Solar Units Export : 1078, Import : 110568, Adjusted : 1078, Bank : 0;Roo (NetMetering) Capacity : 400 KW; Rooftop Solar installation Month : Aug-18; **** PROMPT DISCOUNT Rs. 14079 IF PAID ON OR BEFORE 12-JUN-24	oftop Solar



Page 4 Consumer No. : 155049004099

74474 COM	Current Reading Previous Reading			Consumption	SLOTWISE UNITS		
Meter Type			MF	Adjustment	Slot 1	Slot 3	
Meter Serial Number		Difference		Total Consumption	Slot 2	Slot 4	
TOD EVENET HETER	31/05/24	95346.00		1078.00			
TOD EXPORT METER	30/04/24	95130.50	5.00	0.00	0.00	335.00	
555-X0403855		215.50		1078	743.00	0.00	
				1000	20		
TOD SOLAR GENERATION METER	31/05/24	275265.90		37216.00			
TOD SOLAR GENERATION METER	30/04/24	270613.90	8.00	0.00	11.00	14191.00	
053-18059178		4652.00		37216	22881.00	133.00	
				40404.00			
TOD SOLAR GENERATION METER	31/05/24	371992.10	103000000	12161.00			
TOD GOLAR GENERATION METER	30/04/24	365911.40	2.00	0.00	13.00	4482.00	
053-18059183		6080.70		12161	7607.00	60.0	



Page F

Consumer No.: 155049004099

Adjustment Details							
Adjustment Type	Debit Amount (incl in Bill)	Credit Amount (incl in Arrears)					
PROMPT PAYMENT DISCOUNT	0.00	14,856.00					
Incremental Consumption Rebate	0.00	81,526.50					